

Tri-Proof IP65 Batten 5ft (1500mm) 60W 4000K 7200lm White Non-Linkable

Partcode: ILBTB020 / Page: 1



Any IP65 rated lamp or fitting is water, vapour and dust proof. Integral LED tri-proof battens are also corrosion proof, as there are no metallic components in the casing of the luminaire. Ideal for facilities where steam and dampness are inevitable.

Warehouses with lower ceilings (3-4m) will benefit from these safe and long-lasting luminaires. Emergency and sensor options are available to increase the practicality of this efficient luminaire.

Product Details

Partcode: ILBTB020

Check Code: 041408

Range Name: Tri-Proof

Product Type: Battens

Warranty: 3 Years

CE / RoHS: Yes

Physical Data

Base Colour: Matt white

Product Finish: Matt white

Optic: Polycarbonate diffuser

Material: Polycarbonate

Construction: Injection moulding

Physical Data

Length: 1 500mm

Width: 94mm

Depth: 60mm

Weight (Unpackaged Single Unit): 218g

Lamp or Luminaire Shape: Linear

Luminaire Fixing: Wall/Ceiling mounted and suspended

Electrical Data

Voltage Range: 100-240V

Power Consumption: 60.0 Watts

Input Voltage: 100-240

Driver included: Yes

Electric Current: AC

Frequency Range: 50 Hz

Power Factor: ≥ 0.90

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN-60598

Light Data

Useful Lumens: 7200lm (Rated luminous flux in a 90° cone)

Lumens: 7,200lm

Lumens per Watt: 120.0lm/W

Beam Angle: 120°

Correlated Colour Temperature (CCT): 4000k

Colour Temperature: Cool White

Colour Rendering Index (CRI): ≥ 80

LED Type: Surface mounted device (SMD)


LED Size: 2835

Instant on - Less than 1 second: Yes

Lifetime: 35,000 hrs

Switching Cycles: $>20,000$ X

Environmental

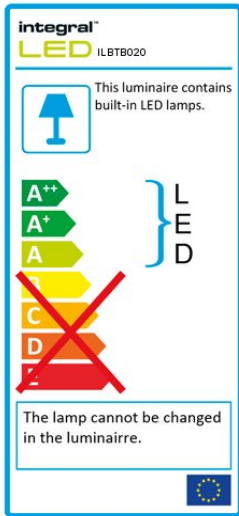

Lowest Operating Temperature: -25 degrees

Maximum Operating Temperature: 40 degrees

IK (Impact Protection) Rating: 9

IP (Ingress Protection) Rating: IP65

Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788228080

Packaged Weight (Unit of 1): 2,100g

Length (unit of 1): 1,570mm

Width (unit of 1): 230mm

Depth (unit of 1): 240mm

Outer packaging info available on website

Product data last updated on: Tuesday, February 25, 2020 - 18:20