

Mini Globe Omni-Lamp 4.5W (40W) 2700K 470lm B22 Dimmable 300 deg Beam Angle

Partcode: ILGOLFB22DC033 / Page: 1



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Product Details

Partcode: ILGOLFB22DC033

Check Code: 910640

Range Name: Omni

Market Segment: Commercial indoor, Residential indoor

Product Type: Mini Globe

Warranty: 2 Years

CE / RoHS: Yes

Physical Data

Lamp Base: B22

Base Type: Bayonet cap

Globe Type: Mini Globe

Globe Finish: Clear

Material: Aluminium, Glass

Construction: glass shell, filament strip, Aluminium Base

Partcode: ILGOLFB22DC033 / Page: 2

Physical Data

Length: 83mm
Width: 45mm
Diameter: 45mm
Weight (Unpackaged Single Unit): 23g
Lamp or Luminaire Shape: Round
Lamp Fixing: Pendant, Wall


Electrical Data

Voltage Range: 220-240V
Power Consumption: 4.5 Watts
Driver included: Yes
Electric Current: AC
Ampage: 24.00mA
Frequency Range: 50 Hz
Power Factor: ≥ 0.70
Wattage Equivalent: 40 Watts
Dimming: Dimmable with compatible dimmers
LVD Certified: Yes
EN: EN-62560

Light Data

Lumens: 470lm
Lumens per Watt: 104.0lm/W
Beam Angle: 300°
Correlated Colour Temperature (CCT): 2700k
Colour Temperature: Warm
Colour Rendering Index (CRI): ≥ 80
LED Type: Filament chip
Instant on - Less than 1 second: Yes
Lifetime: 15,000 hrs
Switching Cycles: $>7,500$ X

Environmental

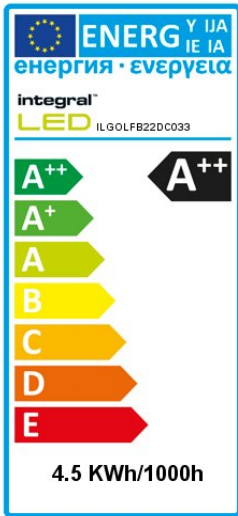

Energy Rating: A++

Lowest Operating Temperature: -20 degrees

Maximum Operating Temperature: 45 degrees

IP (Ingress Protection) Rating: IP20

Hg 0% (Mercury Free): Yes

Packaging



EAN Barcode (unit of 1): 5055788215479

Packaged Weight (Unit of 1): 90g

Length (unit of 1): 48mm

Width (unit of 1): 48mm

Depth (unit of 1): 115mm

Outer packaging info available on website

Product data last updated on: Wednesday, September 11, 2019 - 17:00